


SIGNAL CABLE

IMSA Spec 20-1 • Solid Conductor

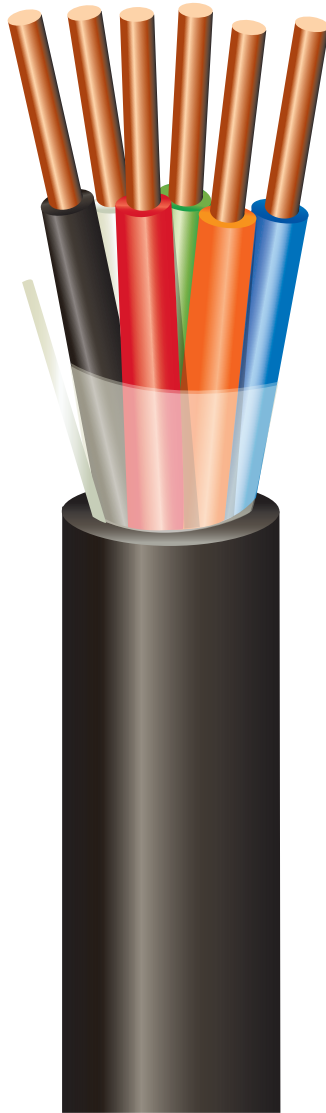

Specifications		Color Code	Put-Ups
Conductor - Solid Bare Copper Insulation 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE Jacket - PE	Voltage Rating - 600 V Temp. Rating - 75°C	Per Specification See Color Code Tables on Page 30	Standard Reels 2,500', 5,000' <i>Other lengths available. Please consult your factory representative for availability.</i>

PART NO.	# of COND	OUTER JKT THICKNESS		NOMINAL OD		SHIP lb / 1M'
		INCH	mm	INCH	mm	
14 AWG						
8202	2	.045	1.143	.322	8.18	58
8203	3	.045	1.143	.339	8.61	75
8204	4	.045	1.143	.369	9.37	94
8205	5	.045	1.143	.402	10.21	113
8207	7	.045	1.143	.435	11.05	146
8209	9	.060	1.524	.538	13.67	186
8210	10	.060	1.524	.580	14.73	220
8212	12	.060	1.524	.597	15.16	254
8214	14	.060	1.524	.626	15.90	325
8215	15	.060	1.524	.660	16.76	311
8216	16	.060	1.524	.660	16.76	325
8219	19	.060	1.524	.694	17.63	375
8220	20	.060	1.524	.729	18.52	395
8221	21	.060	1.524	.729	18.52	413
8225	25	.060	1.524	.808	20.52	478
8226	26	.060	1.524	.808	20.52	501
12 AWG						
8602	2	.045	1.143	.376	9.55	58
8603	3	.045	1.143	.397	10.08	75
8604	4	.045	1.143	.434	11.02	94
8605	5	.045	1.143	.475	12.07	113
8607	7	.045	1.143	.514	13.06	146
8609	9	.060	1.524	.634	16.10	186
8610	10	.060	1.524	.688	17.48	220
8612	12	.060	1.524	.709	18.01	254
8616	16	.060	1.524	.787	19.99	325
8619	19	.060	1.524	.829	21.06	395
8620	20	.080	2.03	.913	23.19	631
8621	21	.080	2.03	.913	23.19	652
8625	25	.080	2.03	1.010	25.65	760

Cable Identification

Indent print on jacket
 "ADVANCED DIGITAL CABLE,
 INC. IMSA 20-1 YYYY* 600V"
**replace YYYY with year of manufacturer*

Inkjet print on reverse side of
 jacket with footage markers.



The information contained on this specification is intended to be used a guide in product selection and is believed to be reliable. ADC has made every effort to ensure the data shown above is accurate at the time of publication. This specification is subject to change anytime without notice.

Phone: (800) 343 2579 • Fax: (828) 389 3922 • www.adcable.com


Rev 33111

Specifications		Color Code	Put-Ups
Conductor - Stranded Bare Copper Insulation 16 AWG - .025" (.635mm) PE 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE	Jacket - PE Voltage Rating - 600 V Temp. Rating - 75°C	Per Specification See Color Code Tables on Page 30	Standard Reels 2,500', 5,000' <i>Other lengths available. Please consult your factory representative for availability.</i>

PART NO.	# of COND	OUTER JKT THICKNESS		NOMINAL OD		SHIP WT / 1M'
		INCH	mm	INCH	mm	
16 AWG						
8362	2	.045	1.143	.322	8.18	58
8363	3	.045	1.143	.339	8.61	75
8364	4	.045	1.143	.369	9.37	94
8365	5	.045	1.143	.402	10.21	113
8367	7	.045	1.143	.435	11.05	146
8369	9	.060	1.524	.538	13.67	186
83610	10	.060	1.524	.580	14.73	220
83612	12	.060	1.524	.597	15.16	254
83616	16	.060	1.524	.660	16.76	325
83620	20	.060	1.524	.737	18.72	395

14 AWG						
8302	2	.045	1.143	.322	8.18	58
8303	3	.045	1.143	.339	8.61	75
8304	4	.045	1.143	.369	9.37	94
8305	5	.045	1.143	.402	10.21	113
8307	7	.045	1.143	.435	11.05	146
8309	9	.060	1.524	.538	13.67	186
8310	10	.060	1.524	.580	14.73	220
8312	12	.060	1.524	.597	15.16	254
8314	14	.060	1.524	.626	15.90	325
8315	15	.060	1.524	.660	16.76	311
8316	16	.060	1.524	.660	16.76	325
8319	19	.060	1.524	.694	17.63	375
8320	20	.060	1.524	.729	18.52	395
8321	21	.060	1.524	.729	18.52	413
8325	25	.060	1.524	.808	20.52	478
8326	26	.060	1.524	.808	20.52	501

12 AWG						
8702	2	.045	1.143	.376	9.55	58
8703	3	.045	1.143	.397	10.08	75
8704	4	.045	1.143	.434	11.02	94
8705	5	.045	1.143	.475	12.07	113
8707	7	.045	1.143	.514	13.06	146
8709	9	.060	1.524	.634	16.10	186
8710	10	.060	1.524	.688	17.48	220
8712	12	.060	1.524	.709	18.01	254
8716	16	.060	1.524	.787	19.99	325
8719	19	.060	1.524	.829	21.06	395
8720	20	.080	2.03	.913	23.19	631
8721	21	.080	2.03	.913	23.19	652
8725	25	.080	2.03	1.010	25.65	760

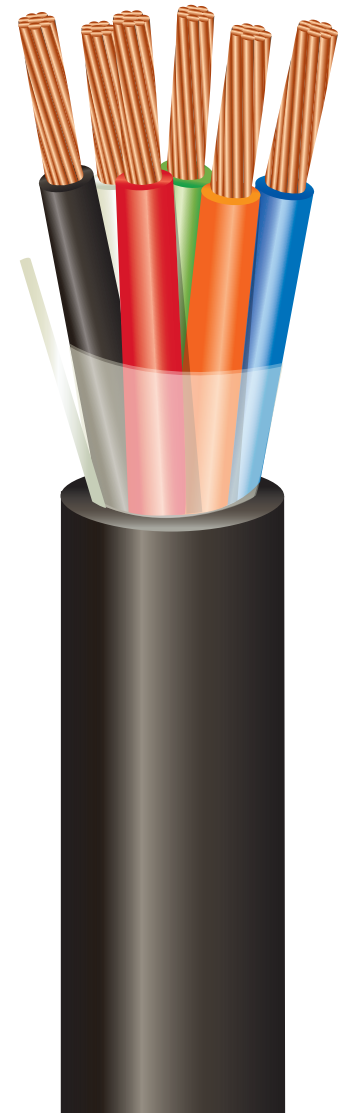

Cable Identification

Indent print on jacket
 "ADVANCED DIGITAL CABLE,
 INC. IMSA 20-1 YYYY* 600V"
**replace YYYY with year of manufacturer*

Inkjet print on reverse side of
 jacket with footage markers.

The information contained on this specification is intended to be used a guide in product selection and is believed to be reliable. ADC has made every effort to ensure the data shown above is accurate at the time of publication. This specification is subject to change anytime without notice.